



| PRESOSTATOS SERIE PS8 / SERIES PS8 SWITCH




SÍMBOLO / SYMBOLS






ESQUEMA CONEXIÓN / CONNECTION DIAGRAM

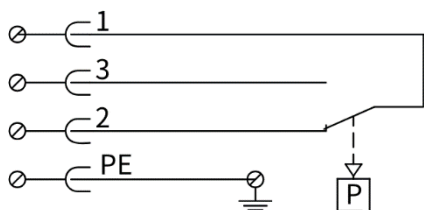

CURVAS / CHARACTERISTIC CURVES (Measured at $t=40^{\circ}\text{C}$, using HLP46)

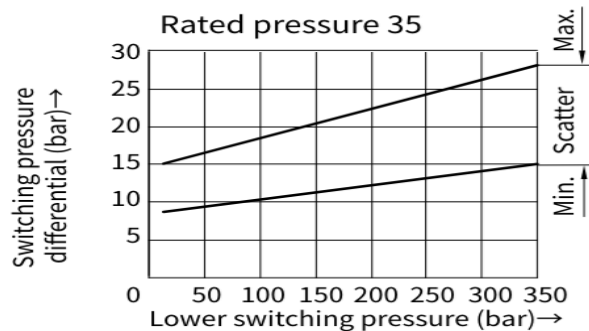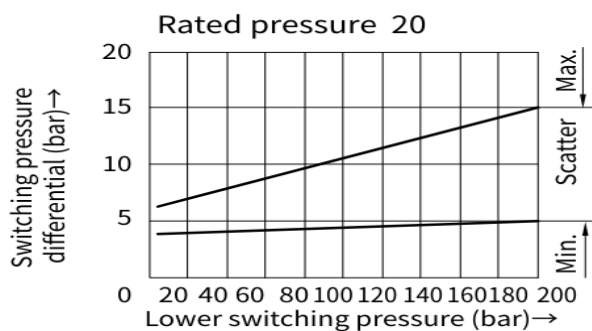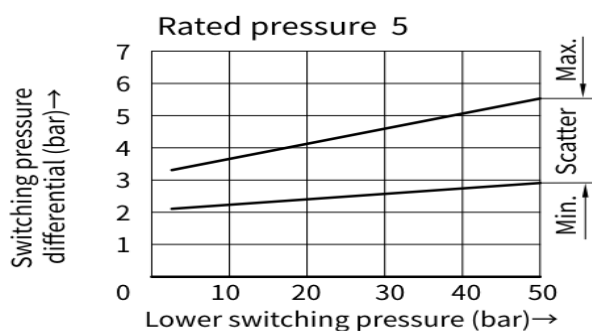

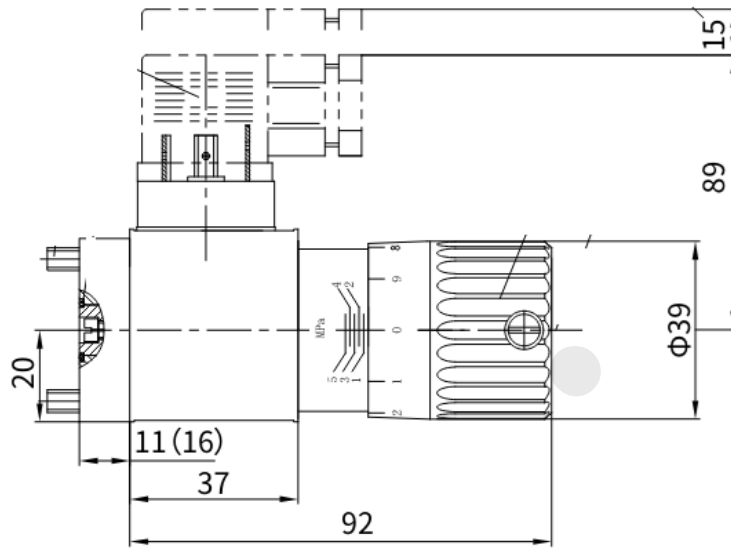

FLUIDO / FLUID
TEMP. FLUIDO /
FLUID TEMP. RANGE
VISCOSIDAD / VISCOSITY
REPETITIVIDAD /
SWITCHING ACCURACY
FRECUENCIA MAX. /
PERMISSIBLE SWITCHING FREQ.
CONEXIÓN ELÉCTRICA/
ELECTRICAL CONNECTION
TENSIÓN MAX. /
MAX. CONTACT LOAD
PROTECCIÓN S/DIN 40 050
PROTECTION TO DIN 40 050

ACEITE MINERAL / MINERAL OIL SUITABLE NBR SEAL

°C -30 to +80

mm²/s 2.8 to 500

<+- 1% DEL AJUSTE / <+- 1% OF SETTING RANGE

VECES/MINUTO 80

TIMES/MIN.

CONECTOR DIN 43 650

PLUG-IN CONNECTOR TO DIN 46 650

-AC 250V/5A

-DC 50V/1A; 125V/0.03A; 250V/0.02A

IP 65